


Remove the holder by using a large flat blade screwdriver in the slot shown; gently twist and prize out that end of the holder....the other end will follow!



The shielded connector is +VE the brown is -VE.

The LEDs only work one way unlike bulbs so you'll have to try them out and reverse them if they don't light.

(this picture shows one of my earlier prototype bulbs!)

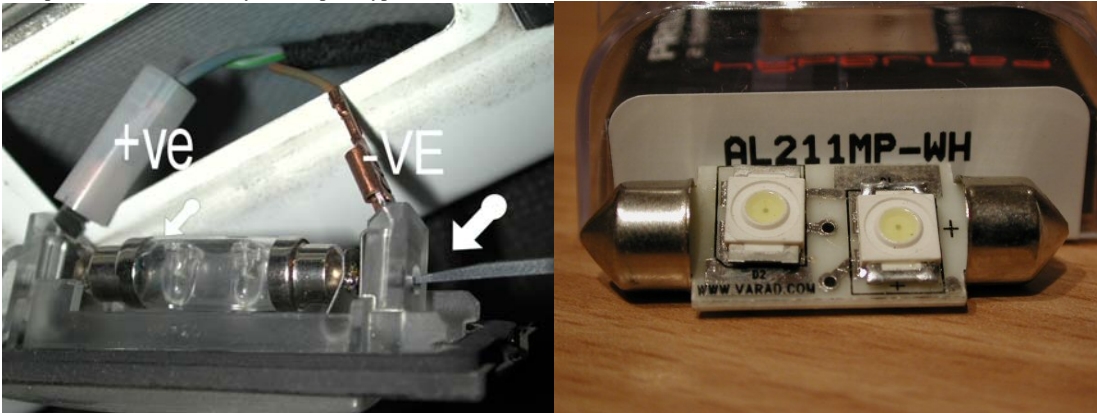

These LED bulbs may be slightly different length to the OEM bulb, if they feel a little loose then remove them and bend the spring ends in a little then refit the bulb.

Make sure the LED's are facing towards the plastic lens.

Switch them on before refitting and just look through the lens to ensure a nice even spread of light.

Refit the lenses and enjoy!

Note: Although the Varad leds are of an exposed type of construction on a board, they should be fine as long as there are no signs of any water leaking onto you oem bulbs. If there is water inside your hatch then you have other problems to deal with! :o)